



DATASHEET

SCREWDRIVER

v1.1











1. Datasheet

1.1. Screwdriver

| General Properties | | Minimum | Typical | Maximum | Unit |
|---------------------------------|--------------------------------|---------------------------|--------------|---------|----------------|
| Torque range | | 0.15 | - | 5 | [Nm] |
| | | 0.11 | - | 3.68 | [lbft] |
| Torque accuracy* | If torque < 1.33 Nm/ 0.98 lbft | - | 0.04 0.03 | - | [Nm] [lbft] |
| | If torque > 1.33 Nm/ 0.98 lbft | - | 3 | - | [%] |
| Output speed | | - | - | 340 | [RPM] |
| Screw length within full safety | | - | - | 35 | [mm] |
| | | - | - | 1.37 | [inch] |
| Shank stroke (screw axis) | | - | - | 55 | [mm] |
| | | - | - | 2.16 | [inch] |
| Shank preload (adjustable) | | 0 | 10 | 25 | [N] |
| Safety feature force | | 35 | 40 | 45 | [N] |
| Storage temperature | | 0 | - | 60 | [°C] |
| | | 32 | - | 140 | [°F] |
| Motor (x2) | | Integrated, electric BLDC | | | |
| IP Classification | | IP54 | | | |
| ESD Safe | | Yes | | | |
| Dimensions | | 308 x 86 x 114 | | | [mm] |
| | | 12.1 x 3.4 x 4.5 | | | [inch] |
| Weight | | 2.5 | | | [kg] |
| | | 5.51 | | | [lb] |

* See [Torque Accuracy Graph](#) for further information.


| Operating Conditions | Minimum | Typical | Maximum | Unit |
|------------------------------------|---------|---------|---------|---------|
| Power supply | 20 | 24 | 25 | [V] |
| Current consumption | 75 | - | 4500 | [mA] |
| Operating temperature | 5 | - | 50 | [°C] |
| | 41 | - | 122 | [°F] |
| Relative humidity (non-condensing) | 0 | - | 95 | [%] |
| Calculated MTBF (operating life) | 30.000 | - | - | [Hours] |

| Supported Screws Metric | | | | | | |
|-------------------------|--|---|--|---|---|-----|
| Material type | Magnetic | | | | | |
| Screw length | Up to 50 mm (35 mm thread length) | | | | | |
| Head type | Cylinder | | | Counter sunk | Button head | |
| Appearance |  |  |  |  |  | |
| Standard | Din 912 / ISO 4762  | ISO 14579  | ISO 14580  | ISO 14581  | DIN 7985A  | |
| Supported Thread Size | M1.6 | ✓ | N/A | N/A | N/A | N/A |
| | M2 | ✓ | ✓ | N/A | ✓ | ✓ |
| | M2.5 | ✓ | ✓ | N/A | ✓ | ✓ |
| | M3 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | M4 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | M5 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | M6 | ✓ | ✓ | ✓ | ✓ | ✓ |


| Supported Screws US Standard | | | |
|------------------------------|---|-------------|--------------|
| Material type | Magnetic | | |
| Screw length | Up to 1.96 inches (1.37 inches thread length) | | |
| Head type | Cylinder | Button head | Counter sunk |

| Supported Screws US Standard | | | | | | |
|------------------------------|------------|--------------|--------------|------------|--------------|-----|
| Appearance | | | | | | |
| Standard | ASME B18.3 | ASME B18.6.3 | ASME B18.6.3 | ASME B18.3 | ASME B18.6.3 | |
| Supported Thread Size | 1# | ✓ | N/A | N/A | N/A | N/A |
| | 2# | ✓ | ✓ | ✓ | N/A | ✓ |
| | 4# | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 6# | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 8# | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 10# | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 12# | N/A | ✓ | ✓ | N/A | N/A |
| | 1/4" | ✓ | N/A | N/A | ✓ | N/A |

Torque accuracy Metric

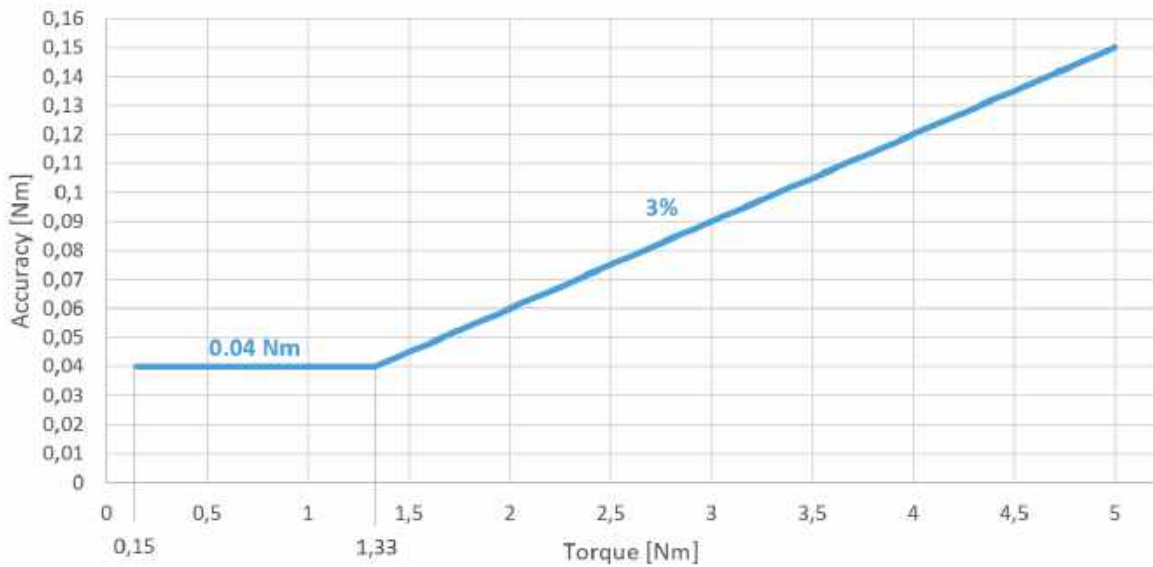


Torque accuracy US Standard

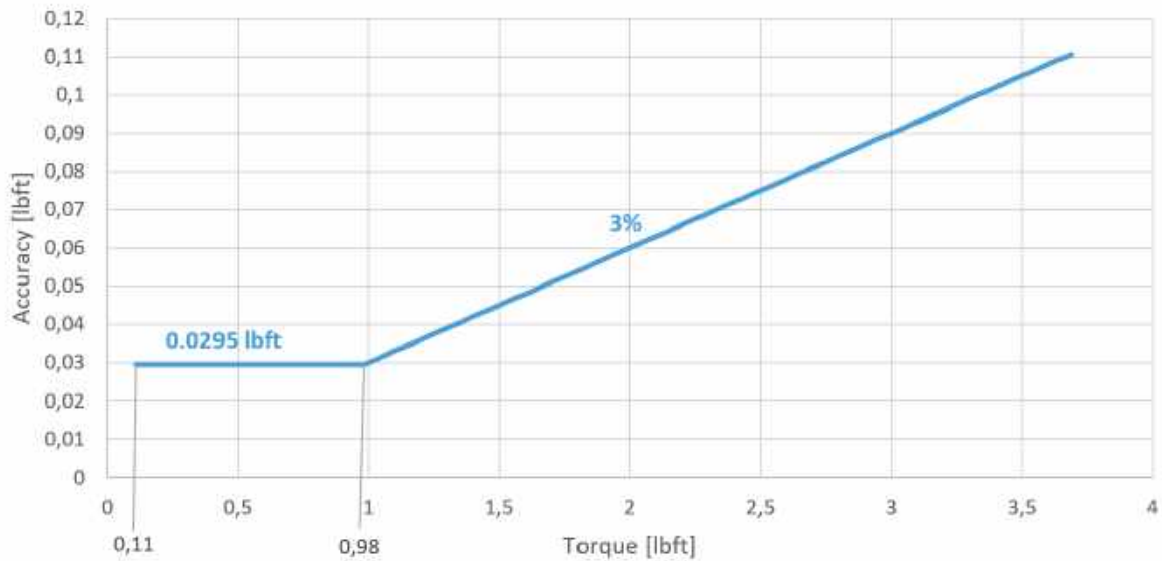

Screw-bit System

This system will highly increase the efficacy of the screws to be picked up, aligned with the bit, moved around with the Screwdriver and screwed in/out. Therefore, it is highly recommended to set up the Screw-bit System correctly to keep a high success rate.

Example of the Screw-bit System for an ISO 14579 screw.

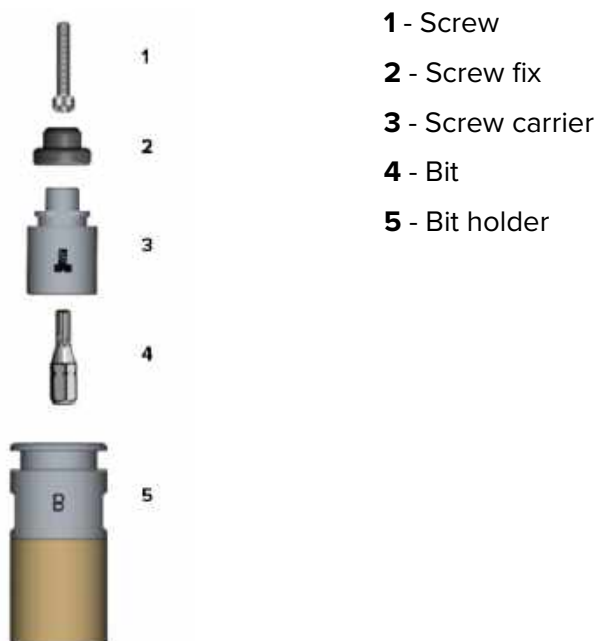

The sections below explain the different components of the Screw-bit System and how to set it up correctly.

In the following tables, an overview of the items needed depending on the Screw type and size are shown.



















Items Needed Depending on Screw Type and Size for Metric Screws

| Items Needed Depending on Screw Type and Size for Metric Screws | | | | | |
|---|---|-----------|-----------|--------------|-------------|
| Head type | Cylinder | | | Counter sunk | Button head |
| Screw standard | Din 912 / ISO 4762 | ISO 14579 | ISO 14580 | ISO 14581 | DIN 7985A |
| Thread Size | Bit holder, bit, screw carrier and screw fix needed | | | | |
| M1.6 | | N/A | N/A | N/A | N/A |
| M2 | | | N/A | | |
| M2.5 | | | N/A | | |
| M3 | | | | | |
| M4 | | | | | |
| M5 | | | | | |

| Items Needed Depending on Screw Type and Size for Metric Screws | | | | | |
|---|-----------------------|------------------------|------------------------|----------------|----------------|
| M6 | S5 M6 M4-6 A | T30 M6 M4-6 A | T30 M6 M4-6 A | T30 M6 A | PH3 M6 A |

Items Needed Depending on Screw Type and Size for US Standard Screws

| Items Needed Depending on Screw Type and Size for US Standard Screws | | | | | |
|--|---|----------------|--------------|--------------|--------------|
| Head type | Cylinder | Button head | | Counter sunk | |
| Screw standard | ASME B18.3 | ASME B18.6.3 | ASME B18.6.3 | ASME B18.3 | ASME B18.6.3 |
| | HEX | Cross recessed | Torx | HEX | Torx |
| Thread Size | Bit holder, bit, screw carrier and screw fix needed | | | | |
| 1# | H1/16" 1# | N/A | N/A | N/A | N/A |
| 2# | H5/64" 2#-6# | PH1 2# | T8 2# | N/A | T6 2# |
| 4# | H3/32" 2#-6# | PH1 4# | T10 4# | H1/16" 4# | T8 4# |
| 6# | H7/64" 2#-6# | PH1 6# | T15 6# | H5/64" 6# | T10 6# |

| Items Needed Depending on Screw Type and Size for US Standard Screws | | | | | |
|---|--|---|---|--|---|
|  8# |  H9/64" 8#-1/4" |  PH2 8# |  T20 8# |  H3/32" 8# |  T15 8# |
|  10# |  H5/32" 8#-1/4" |  PH2 10# |  T25 10# |  H1/8" 10# |  T20 10# |
|  12# | N/A |  PH3 12# |  T27 12# | N/A | N/A |
|  1/4" |  H3/16" 8#-1/4" | N/A | N/A |  T30 1/4" | N/A |

1. Screws

The first step is to know what type of screw is going to be used. The screw type will define what type of bit, screw carrier, screw fix (if any) and bit holder shall be used.

The recommended screw types for the Screwdriver are the ones that have the properties mentioned previously on the [Supported Screws](#) table.

2. Bit Holder

Select the right bit holder depending on the screw type and size to maximize the efficacy of the Screw-bit System based on the table in section [Items Needed Depending on Screw Type and Size for Metric](#) or [Items Needed Depending on Screw Type and Size for US Standard Screws](#).




The Bit holder generates a magnetic force that will keep the screw attached and aligned to the bit. The Bit holder **A** generates a higher magnetic force than **B**. Therefore, the bit holder B is commonly used for the smaller and lighter screws.

3. Bits

Select the right bit depending on the screw type and size to maximize the efficacy of the Screw-bit System based on the table in section [Items Needed Depending on Screw Type](#)

and Size for Metric or Items Needed Depending on Screw Type and Size for US Standard Screws.

The bits have signifiers to help identifying what bit type and size these are.

| Screw type standard | Shows bit size and type |
|--|--|
| Din 912 / ISO 4762 ASME B18.3 HEX Cylinder |  |
| ISO 14579 ISO 14580 ISO 14581 ASME B18.6.3 Torx Button head ASME B18.6.3 Torx Counter sunk |  |
| DIN 7985A ASME B18.6.3 Cross recessed Button head |  |

Supported bit shank properties:

- Type 1/4" HEX
- Length 25 mm





NOTE:

Bits longer than 25 mm could be used. However, the screw carrier and the screw fix might not hold the screw properly in place.

4. Screw Carrier and Screw Fix

Select the right screw carrier and screw fix depending on the screw type and the size to maximize the efficacy of the Screw-bit System based on the table on section Items needed depending on Screw type and size.

The screw carriers have signifiers to help identifying what screw type and size these can be used with.

| Screw thread size | Screw type illustration |
|---|---|
|  |  |

The screw fixes are only needed for the Din 912, ISO 4762, ISO 14579, ISO 14580 and ASME B18.3 HEX Cylinder screw types. The screw fixes also have signifiers to show what size of screw they support.







| Screw fixes for Metric - Din 912, ISO 4762, ISO 14579, ISO 14580 | | | | | | |
|--|----|------|----|----|----|----|
| M1.6 | M2 | M2.5 | M3 | M4 | M5 | M6 |
| | | | | | | |

| Screw fixes for US Standard - ASME B18.3 HEX Cylinder | | | | | | |
|---|----|----|----|----|-----|------|
| 1# | 2# | 4# | 6# | 8# | 10# | 1/4" |
| | | | | | | |

All screw carries must be adjusted to ensure high performance of the Screw-bit System.





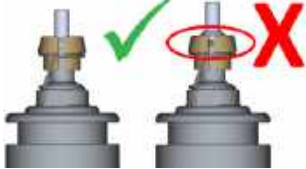

| Appearance | Adjustment method |
|------------|-------------------|
| | |
| | |

The screw carries must be adjusted so that the screw head seats stable on the screw carrier avoiding a gap in between. See the pictures below as reference.

| | | | | | |
|---|---|---|---|--|---|
| <p>Din 912 / ISO 4762 / ISO 14579 / ISO 14580 / ASME B18.3 Hex Cylinder</p> |  | <p>ISO 14581 / ASME B18.6 HEX Counter sunk / ASME B18.6.3 Torx Counter sunk</p> |  | <p>DIN 7985A / ASME B18.6.3 Cross recessed Button head / ASME B18.6.3 Torx Button head</p> |  |
|  | |  | |  | |

When this is achieved, remove the screw and push in the screw fix (only Din 912, ISO 4762, ISO 14579, ISO 14580 and ASME B18.3 HEX Cylinder screw types).

The final setup of the Screw-bit System with the screw in place should look like picture below.

| Screw standard | Din 912 / ISO 4762 / ISO 14579 / ISO 14580 / ASME B18.3 Hex Cylinder |  | ISO 14581 / ASME B18.6 HEX Counter sunk / ASME B18.6.3 Torx Counter sunk |  | DIN 7985A / ASME B18.6.3 Cross recessed Button head / ASME B18.6.3 Torx Button head |  |
|-----------------------------------|--|---|---|---|--|---|
| Screw-bit System appearance |  | |  | |  | |

5. Attaching and Detaching the Screw-bit System to/from the Screwdriver

The last step is to attach the system to the Screwdriver by placing the hex shape of the bit holder inside of the end of the screwdriver's shank as shown in the picture below. The system will be attached to the screwdriver by a magnetic force.



To remove the Bit holder from the screwdriver's shank, follow the steps below:


1. Move the shank all the way out to position 55 by operating the user interface in the robot or in the Web Client.
2. As shown in the images below, use the provided key to grab the Bit holder.
3. While holding the key, move the shank inwards by operating the user interface in the robot or in the Web Client.




Screwdriver Position to Execute Commands

To successfully execute the screwdriver commands, it is fundamental to position the screwdriver correctly. This is achieved if the following two conditions are met:

1. The Screw-bit System must be perfectly aligned to the screw or thread.

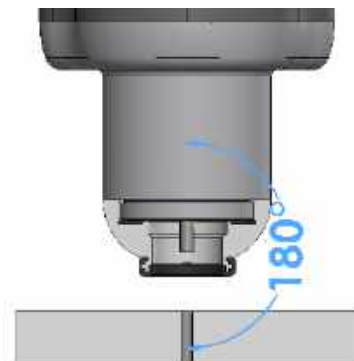

- The distance between the Screwdriver's bottom part and the surface where the action takes place must be within the range of 0-8 mm [0-0.31 inches].

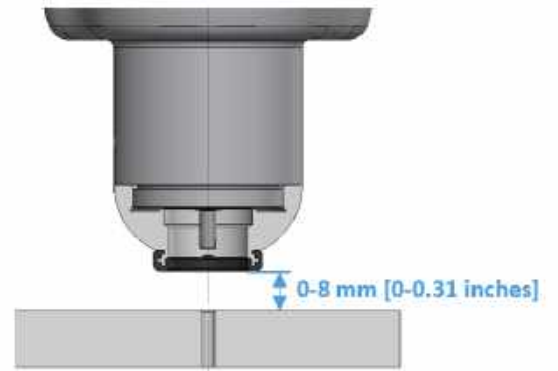

LED - Device Status

The screwdriver has a LED that shows the device status.

| Color | Device Status |
|-----------------|--------------------------------|
| No light | Power missing |
| Steady green | Ready to work - Idle - Static |
| Blinking green | Initializing |
| Steady orange | Busy – Moving/rotating shank |
| Blinking orange | Operational malfunction |
| Steady red | Not working – Hardware problem |
| Blinking red | Safety – Emergency stop |



Torque Angle Curve and Torque Gradient

The torque gradient shows how the torque is applied in the last phase of the Tightening screw command. This could be used as an indicator to detect if a Tightening command is performed correctly.

For instance, the torque gradient could be different if:


- The hole thread is not long enough

- The hole thread is different from the screw thread
- The hole thread is not clean (for instance by deburrs from CNC machining)
- The friction between the screw thread and the hole thread is too low or too high
- The friction between the screw head and the tighten part is too low or too high


A torque gradient variable is made available to be checked in the robot program.

The graph below shows a normal Torque/Angle curve. In this case has been made with a M4 screw and 2.4 Nm as target torque.


Torque angle curve Metric

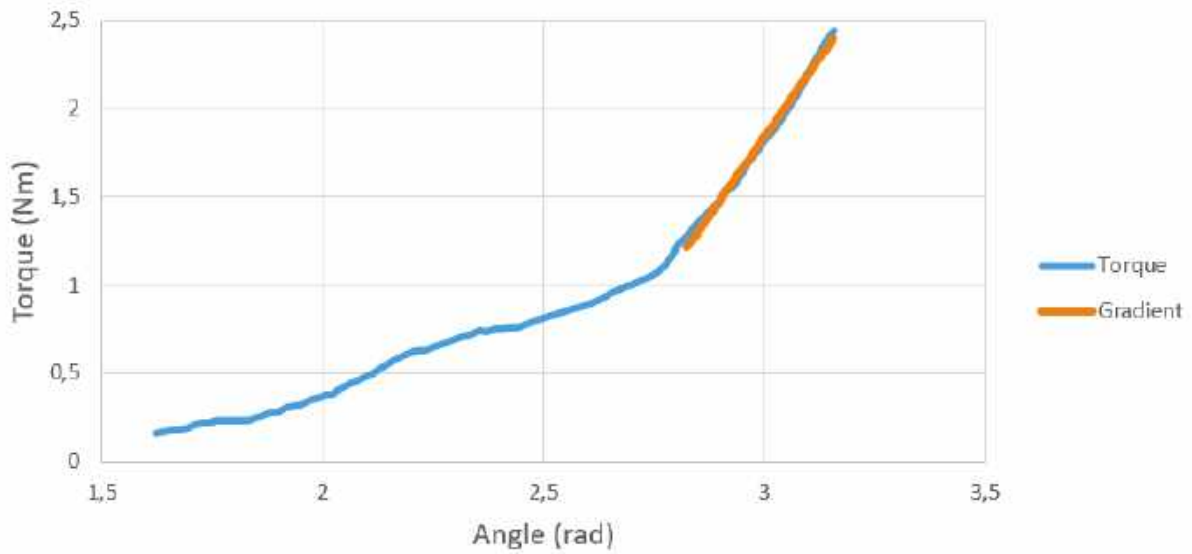

Torque angle curve US Standard

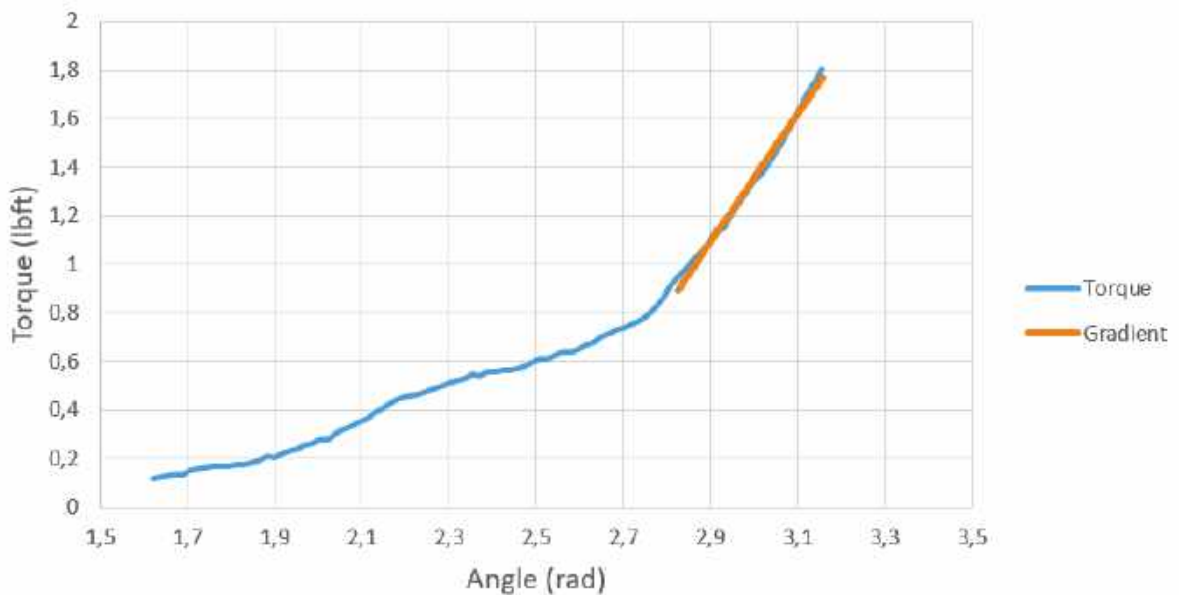

1.2. Screwdriver

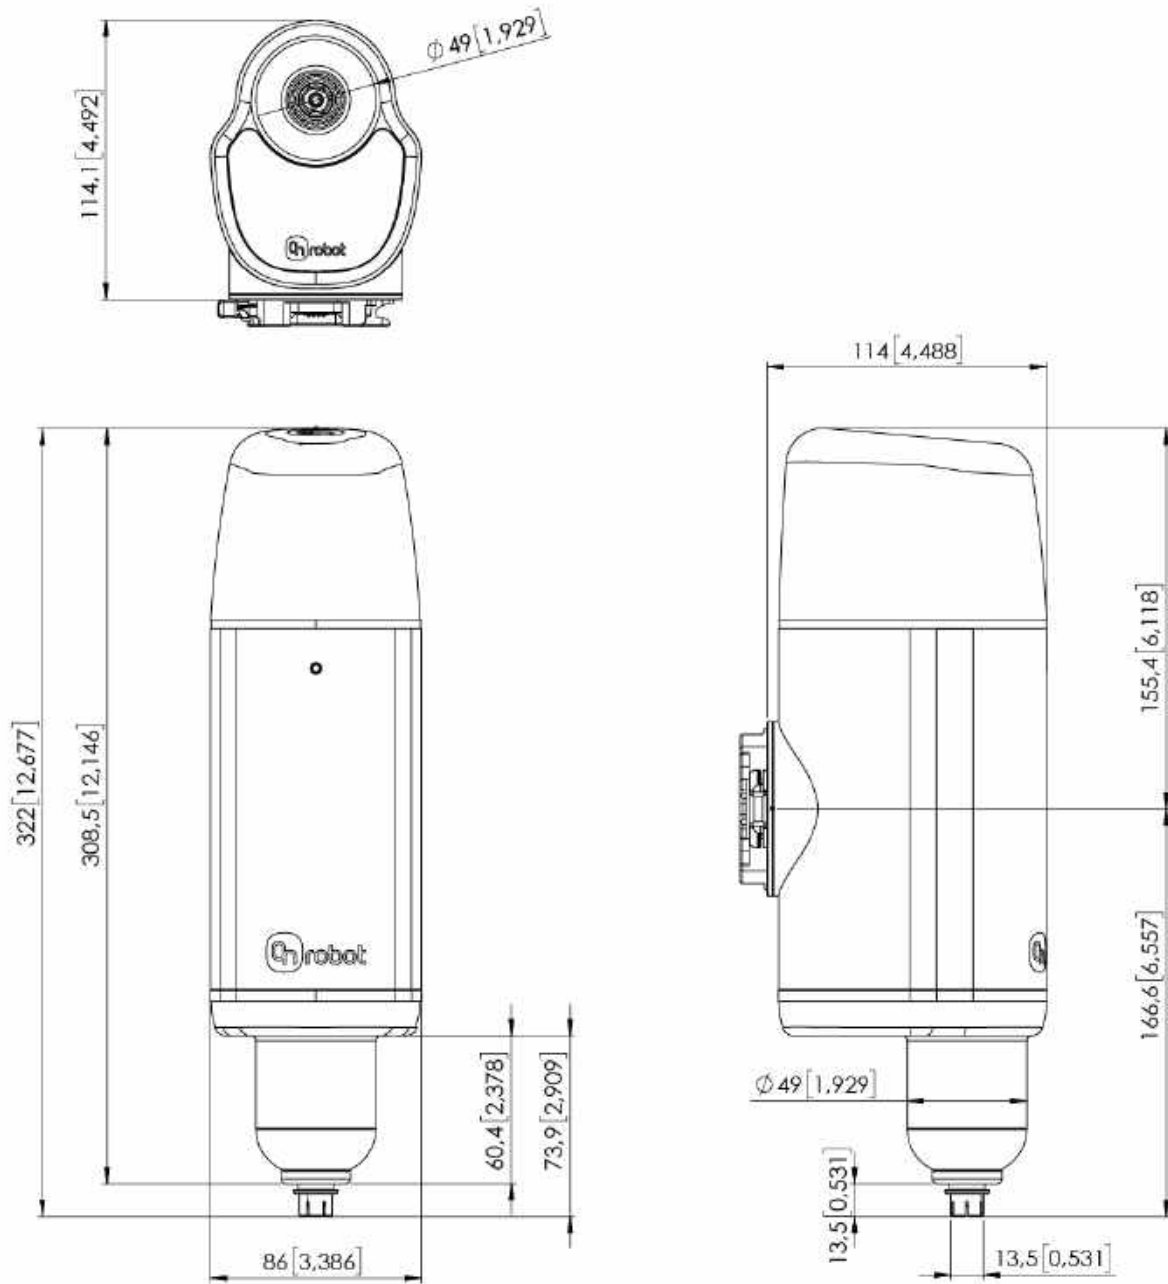

All dimensions are in mm and [inches].